



VEHICLE

Grader

RISK

People entering hazard zones at the back of the machine

Operators and site health and safety were concerned of potential plant-people interaction at the grader's rear blind spot due to the quick and frequent backwards operation of the vehicle.

Blindsight was fitted to the machine with both sensors observing this rear danger zone. The in-cab alert was installed in the operator's peripheral vision.



When Blindsight detects a person, the operator is alerted to the direction of the danger by the in-cab alert with flashing lights and an optional beeping or vibration noise.

Each detection event is saved, and a video is automatically uploaded to the cloud for analysis and review by health and safety.

As a result, the operator gained better situational awareness and health and safety was able to report on potential near misses.

Recommended installation  
NOT TO SCALE

BPU | Sensor | In-cab alert

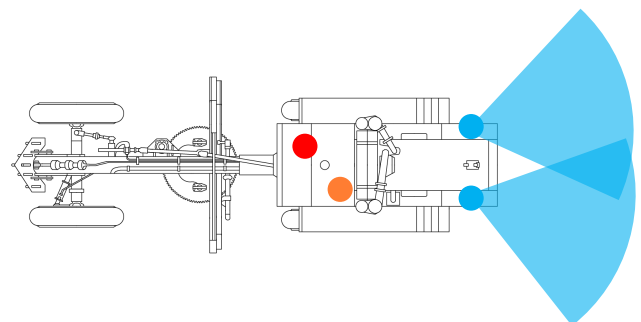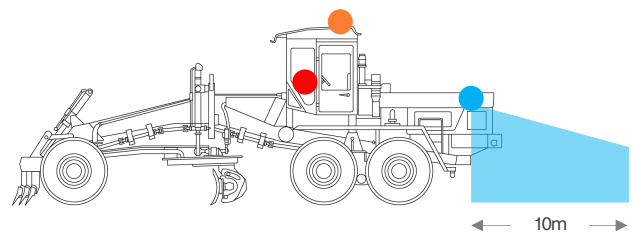

**Hardware**

1x Blindsight Processing Unit (BPU), 2x Sensor with bolt mount, 2x 10m cable, 1x In-cab alert.

**Configuration**

People detection on. Region of interest to mask out any visible sections of plant and limit detection distance. Alerts enabled when vehicle is in reverse.